



35mm Ø DOWEL HANDEL

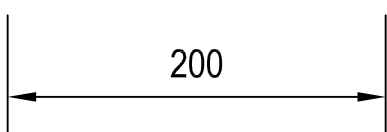

TO MAKE A PAIR OF ISHI SASHI:
2 x BASE
2 x HANDEL
4 x END PANELS

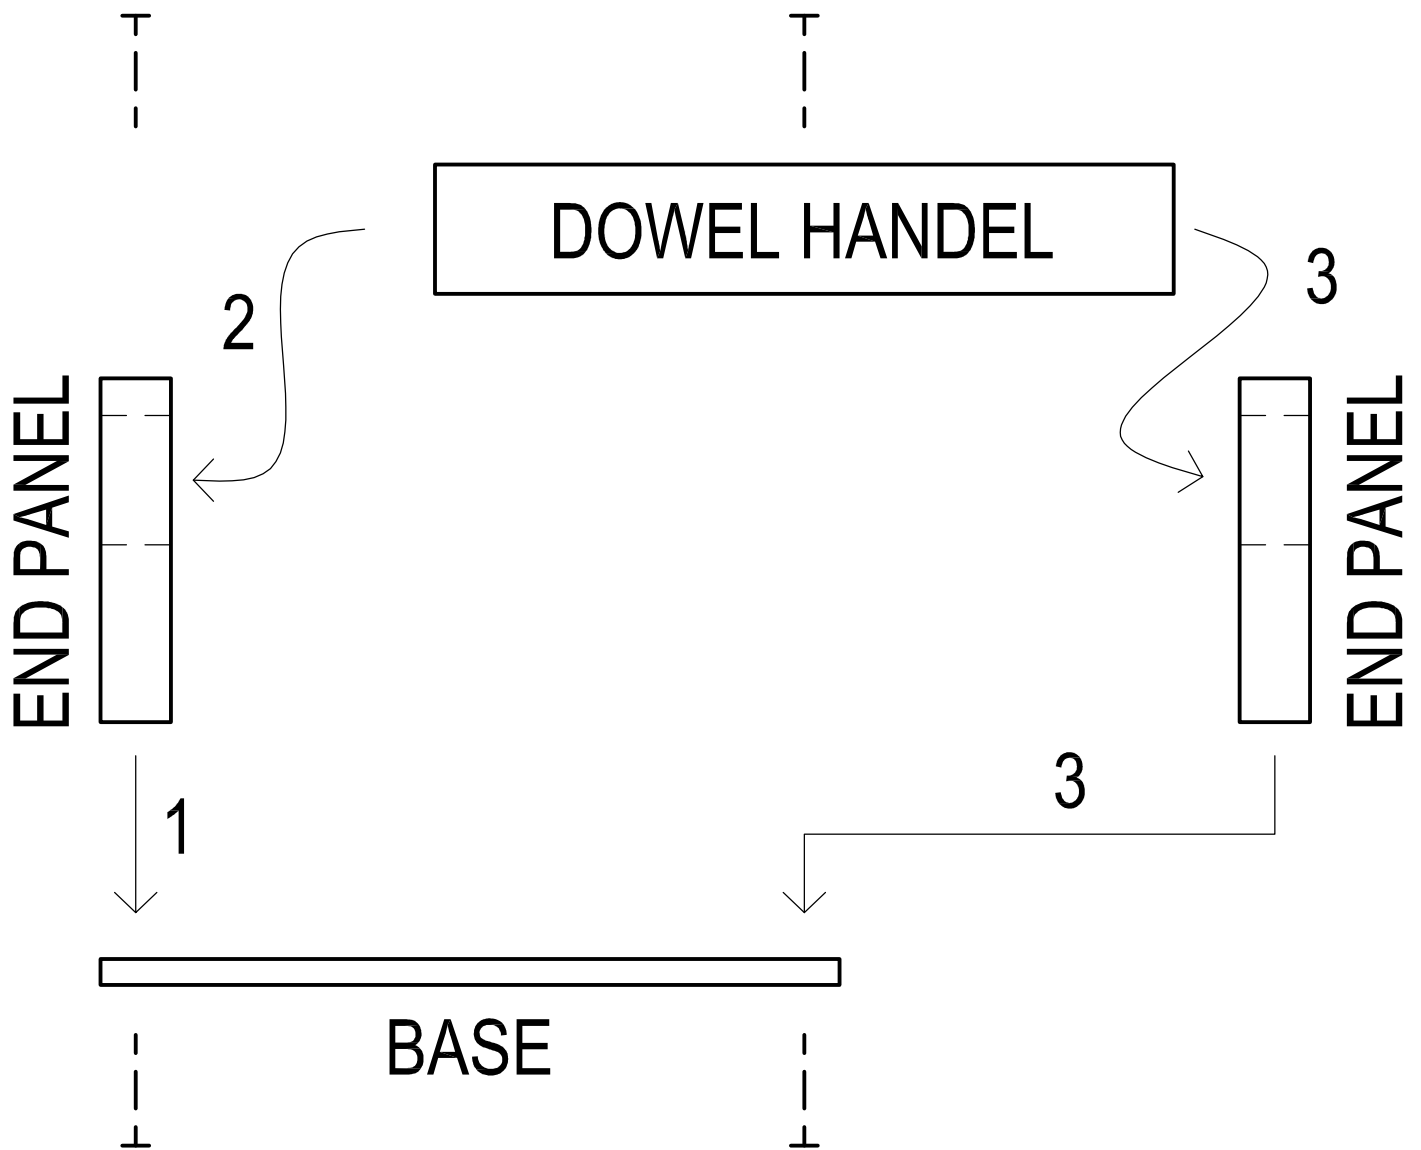

- FIX FIRST END PANEL TO BASE (1) - GLUE & SCREW FIX.
- INSERT HANDEL INTO FIRST END PANEL (2)
- PLACE SECOND END PANEL TO BASE AND INSERT HANDEL (3) - GLUE & SCREW FIX TO BASE.
- GLUE & SCREW FIX HANDEL TO END PANELS.
- WRAP BRICK IN DUCT TAPE.
- POSITION HANDEL AND ATTACH USING DUCT TAPE.

NOTE: If you have a nice clean brick and want to keep it exposed, you could drill into the top of the brick & through the base & fix with a couple of masonry anchors.
 Leave the fitting & fixing of the dowel handle last for ease of fitting masonry anchors.